

APTICOM | ASB-746[04-11]

## SFP 2,67G MR. CWDM 80km 0-70°C Optical Transceivers

### Features

- Management interface specifications per SFF-8074i and SFF-8472
- Supports up to 2.67Gbps bit rate
- Class 1 Laser Safety Certified
- CWDM DFB Transmitter
- APD Receiver
- Up to 80km on Single Mode Fiber (SMF)
- Operating Temperature 0 to 70°C
- Power dissipation  $\leq 1.5W$
- Single 3.3V power supply



### Applications

- SONET OC-48/SDH STM-16
- 2x Fiber Channel

### Description

The ASB-746[04-11] series are high-performance transceivers for up to 2.67Gbps CWDM 80km links over dual single mode fiber. It is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable.

The transceiver module is RoHS-6 compliant per Directive 2011/65/EU.

**CAUTION!** Optical input power in excess of the maximum recommended value could cause irreparable damage to the APD receiver.

**CAUTION!** The transceiver is a static-sensitive device. Always use an ESD wrist strap or similar individual grounding device when handling transceiver modules or coming into contact with modules.

### Order Information

Part Number	Wavelength	Protocol	Tx Output Power	Rx Sensitivity [1]	Reach [2]	Temp.
ASB-746[04-11]	ITU CWDM	OC-48/STM-16	0 to 5dBm	$\leq -29dBm$	$\leq 80km$	0-70°C

**1.** Measured with 2.48832Gbps PRBS 2<sup>23</sup>-1, ER=9dB, BER $\leq 10^{-12}$  **2.** On standard single-mode fibre (SMF, G.652)

## Channel Guide (ITU-T CWDM)

Part Number	Wavelength [nm]	Part Number	Wavelength [nm]
ASB-74604	1471	ASB-74608	1551
ASB-74605	1491	ASB-74609	1571
ASB-74606	1511	ASB-74610	1591
ASB-74607	1531	ASB-74611	1611

## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Min	Typ	Max	Unit
Storage Temperature	-40		85	°C
Relative Humidity	5		95	%
Supply Voltage	-0.5		3.6	V

## Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit
Operating Case Temperature	0		70	°C
Supply Voltage	3.15	3.3	3.45	V
Data Rate, Optical Lane	0.125	2.48832	2.67	Gbps

## Transceiver Electrical Parameters

EOL, over the full temperature range,  $V_{cc} = 3.15$  to  $3.45V$ .

Parameter	Min	Typ	Max	Unit
Supply Current			450	mA
Power Dissipation			1.5	W
<b>Transmitter</b>				
Input Differential Impedance		100		$\Omega$
Differential Data Input Swing	300		2200	mVpp
Tx_Fault (normal operation) [1]	0		0.8	V
Tx_Fault (fault condition) [1]	2.0		$V_{cc}$	V
Tx_Disable (normal operation)	0		0.8	V
Tx_Disable (transmitter disable)	2.0		$V_{cc}$	V
<b>Receiver</b>				
Output Differential Impedance		100		$\Omega$
Differential Output Data Swing [2]	400		1200	mVpp
Rx_LOS (normal operation) [1]	0		0.8	V
Rx_LOS (loss of signal) [1]	2.0		$V_{cc}$	V

**1.** Open collector, to be pulled up with 4.7kohm **2.** Internally AC-coupled, to be terminated with 100ohm differential load

## Transmitter Optical Specification

EOL, over the full temperature range, Vcc = 3.15 to 3.45V.

Parameter	Min	Typ	Max	Unit
Launched Optical Power [1]	0		5	dBm
Centre Wavelength Range	1464.5		1617.5	nm
Centre Wavelength [2]	$\lambda-6.5$	$\lambda$	$\lambda+6.5$	nm
Spectral Width (-20dB)			1	nm
Extinction Ratio	8.2			dB
Rise/Fall Time (20/80%)			160	ps
Dispersion Penalty			2	dB

**1.** Coupled into 9/125um SMF **2.**  $\lambda$  according to ITU-T G.694.2 CWDM 20nm grid

## Receiver Optical Specification

EOL, over the full temperature range, Vcc = 3.15 to 3.45V.

Parameter	Min	Typ	Max	Unit
Operating Wavelength	1464.5		1617.5	nm
Receiver Sensitivity [1]			-29	dBm
Receiver Overload	-9			dBm


**1.** Measured with 2.48832Gbps PRBS 2<sup>23</sup>-1, ER=9dB, BER $\leq$ 10<sup>-12</sup>

## Transceiver Pins

Pin #	Name	Description	Pin #	Name	Description
1	VeeT	Module Transmitter Ground	11	VeeR	Module Receiver Ground
2	Tx_Fault	Module Transmitter Fault	12	RD-	Receiver Inverted Data Output
3	Tx_Disable	Transmitter Disable	13	RD+	Receiver Non-Inverted Data Output
4	MOD-DEF2	Module Definition 2	14	VeeR	Module Receiver Ground
5	MOD-DEF1	Module Definition 1	15	VccR	Module Receiver 3.3 V Supply
6	MOD-DEF0	Module Definition 0	16	VccT	Module Transmitter 3.3 V Supply
7	Rate Select	Not Used	17	VeeT	Module Transmitter Ground
8	LOS	Loss of Signal	18	TD+	Transmitter Non-Inverted Data Input
9	VeeR	Module Receiver Ground	19	TD-	Transmitter Inverted Data Input
10	VeeR	Module Receiver Ground	20	VeeT	Module Transmitter Ground

## Transceiver Pad Layout

SFP-compliant 20-pin connector as per INF-8074.

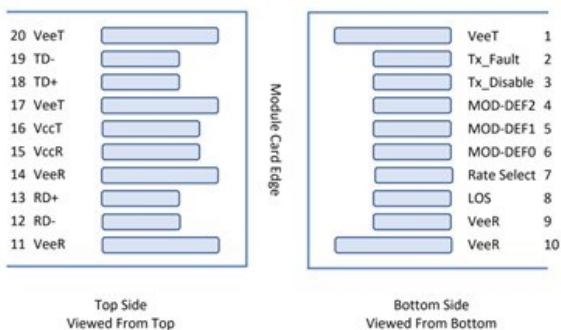

## Regulatory Compliance

The ASB-746[04-11] series of transceivers are Class 1 Laser Products and certified per the following standards:

Item	Agency	Standard
Laser Eye Safety	TÜV	EN 60825-1:2014 EN 60825-2:2004+A1+A2
Electrical Safety	TÜV	EN 60950-1:2006+A11+A1+A12+A2

## Revision Information

Revision	Date	Description
A	2024-01-26	Initial release

## For more information

### APTICOM AB

Skalholtsgatan 10  
SE-164 40 Kista  
Sweden

[info@apticom.com](mailto:info@apticom.com)

### APTICOM SRL

Rue Santos-Dumont 1  
6041 Gosselies  
Belgium