

## HPL-70270-xx


# 10Gb/s 1310nm 10km Rate Select SFP+ Transceiver

## Product Description

The 70270-xx is a 10Gbps enhanced small form factor pluggable SFP+ optical transceiver. It's designed for use in 10-Gigabit Ethernet and Fiber Channel links up to 10km over dual strand Single Mode fiber. The Rate select function allows use in both 1-4.25G and 10-Gigabit links.

## Features

- 10Gbps data links
- Up to 20km in 9/125 $\mu$ m SMF
- 1310nm DFB laser
- Rate Select
- Hot-pluggable
- Single 3.3V power supply
- Power Consumption < 0.8W
- Digital Diagnostic Monitor (DDM)

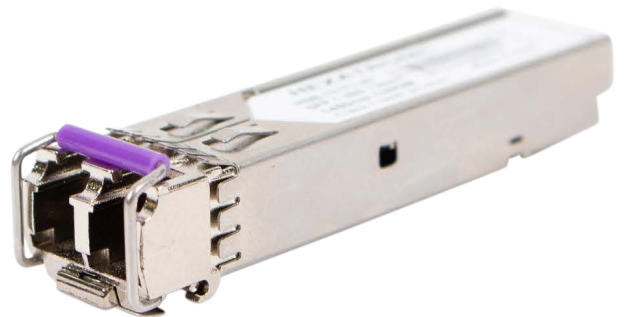

## Applications

- 10GBase-LR/LW Ethernet
- 1200-SM-LL-L 10G FC

## Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V <sub>cc</sub>	-0.5	4	V
Storage Temperature	T <sub>s</sub>	-40	85	°C
Operating Case Temperature	T <sub>c</sub>	0	70	°C

## Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Power Supply Voltage	V <sub>cc</sub>	3.15	3.3	3.45	V
Power Supply Current	I <sub>cc</sub>			200	mA
Data Rate			10		GBps
Max Link Length on 9/125µm SMF	L <sub>max</sub>		10	20	km

## Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
<b>Transmitter</b>					
Centre Wavelength	λ <sub>c</sub>	1260	1310	1360	nm
Spectral Width (-20dB)	σ			1	nm
Average Output Power	P <sub>out</sub>	-5		0	dBm
Extinction Ratio	ER	3.5			dB
Average Launch Power of Off Transmitter	P <sub>off</sub>			-30	dBm
<b>Receiver</b>					
Centre Wavelength	λ <sub>c</sub>	1200	1310	1600	nm
Receiver Sensitivity	P <sub>IN</sub>			-14	dBm
Receiver Overload	P <sub>max</sub>	0.5			dBm
LOS De-Assert	LOS <sub>D</sub>			-20	dBm
LOS Assert	LOS <sub>A</sub>	-23			dBm
LOS Hysteresis		0.5		4.5	dB

## Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
<b>Transmitter</b>					
Input Differential Impedance	Zin	90	100	110	$\Omega$
Data Input Swing Differential	Vin	250		1200	mV
Tx-Dis Disable	Vd	2.0		Vcc	V
Tx-Dis Enable	Ven	0		0.8	V
<b>Receiver</b>					
Data Output Swing Differential	Vout	250		800	mV
Rx-Los Fault	Vlf	2.0		VcchOST	V
Rx-Los Normal	Vln	0		0+0.8	V
Output rise and fall time	Tr, Tf	30			ps

## DDM Thresholds

	Low Alarm	Low Warn	High Warn	High Alarm
Temperature	-10°C	-5°C	75°C	80°C
Voltage	3V	3.1V	3.6V	3.7V
Tx Bias	15mA	20mA	75mA	80mA
Tx Power	-12dBm	-8dBm	0.5dBm	3.5dBm
Rx Power	-18dBm	-16dBm	0.5dBm	3.5dBm

For safety and reliability reasons, please read the following information carefully.

Light Budget is one of the key items for designing fiber optic network. In order to create a product that will meet application requirements. To adequately characterize the budget loss, the following key parameters are generally considered:

- Transmitter: Output power, temperature and aging
- Fiber connections: Active connection and splices
- Fiber Cable: fiber attenuation and temperature effect
- Receiver: Detector sensitivity
- Others: Safety margin and repairs

When one of the above-listed variables fails to meet specifications, the performance of the network can be greatly affected or worse, the degradation can lead to network failure. Unfortunately, not all the variables can be controlled with ease during the deployment of the network or the maintenance stage; however, there exists one component—the connector—that is too-often overlooked, sometimes overused (test jumpers) but that can be controlled using the proper procedure.



This is a Class 1 Laser Product according to IEC 60825-1:2014 compatible with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).



This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



Dirt / debris

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination. In a study by NTT-Advanced Technology, 98% of installers and 80% of network owners reported that issues with connector contamination were the greatest cause of network failures.

## CE EU declaration of conformity

The CE marking is mandatory for this category of products. It is the manufacturer's declaration that the product meets the requirements of the applicable EU directives required to allow free movement and sale of the product throughout the European Economic Area.

### Equipment Specific part number extension

#### -XX\*

- 51 Cisco
- 52 Ericsson
- 53 Huawei
- 54 Juniper
- 55 Generic (MSA)
- 56 HP
- 57 Extreme
- 58 3COM (HP)
- 59 Alcatel (Nokia)
- 60 Combo code
- 61 H3C (HP)
- 62 Brocade
- 63 Arista Networks
- 64 Adva
- 65 Microsens